

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
2204/150Total Pages in this Submission  
43**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**SYSTEM, DEVICE, AND METHOD FOR ESTABLISHING LABEL SWITCHED PATHS ACROSS MULTIPLE AUTONOMOUS SYSTEMS**

and invented by:

Anoop Ghanwani  
Andre Fredette  
Naganand DoraswamyJC584 U.S. PTO  
09/473103  
12/28/99If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☐ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 24 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

2204/150

Total Pages in this Submission

43

## Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☐ Formal Number of Sheets \_\_\_\_\_
- b. ☒ Informal Number of Sheets 10
4. ☒ Oath or Declaration
- a. ☐ Newly executed (original or copy) ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

## Accompanying Application Parts

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail (Specify Label No.): EL442683730US

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
2204/150

Total Pages in this Submission  
43

## Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)


16. ☐ Additional Enclosures (please identify below):

## Fee Calculation and Transmittal

### CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	17	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	5	- 3 =	2	x \$78.00	\$156.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$916.00

- ☐ A check in the amount of \_\_\_\_\_ to cover the filing fee is enclosed.
- ☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. \_\_\_\_\_ as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
  - ☐ Credit any overpayment.
  - ☐ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
  - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

  
Signature

Jeffrey T. Klayman, Reg No. 39,250  
BROMBERG & SUNSTEIN LLP  
125 Summer Street  
Boston, MA 02110  
(617) 443-9292

Dated: December 28, 1999

cc:

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR UNITED STATES PATENT

FOR

**SYSTEM, DEVICE, AND METHOD FOR ESTABLISHING  
LABEL SWITCHED PATHS ACROSS MULTIPLE AUTONOMOUS SYSTEMS**

Inventors:

**Anoop Ghanwani**  
147 Parlmont Park  
North Billerica, MA 01862

**Andre Fredette**  
21 Old Carriage Path  
Groton, MA 01450

**Naganand Doraswamy**  
112 Hutchinson Road  
Arlington, MA 02474

Attorney Docket: 2204/150 (PP355)

Attorneys:

**BROMBERG & SUNSTEIN LLP**  
125 Summer Street  
Boston, MA 02110  
(617) 443-9292

# **SYSTEM, DEVICE, AND METHOD FOR ESTABLISHING LABEL SWITCHED PATHS ACROSS MULTIPLE AUTONOMOUS SYSTEMS**

5

## **FIELD OF THE INVENTION**

The present invention relates generally to communication systems, and more particularly to establishing label switched paths across multiple autonomous systems using the Label Distribution Protocol (LDP).

10

## **BACKGROUND OF THE INVENTION**

In today's information age, communication devices, such as computers and computer peripherals, are often internetworked over a communication network. A common networking model routes packets of information within the communication network using a networking protocol such as the Internet Protocol (IP) or other network layer protocol. Some networking protocols, such as IP, are considered to be "connectionless" networking protocols. In a connectionless networking protocol, each packet of information includes a network layer address, and each router forwards the packet of information based upon the network layer address according to a predetermined routing protocol such as the Open Shortest Path First (OSPF) protocol, the Routing Information Protocol (RIP), Hello, or other routing protocol.

15

20

25

Thus, each router makes an independent forwarding decision for the packet based upon the network layer address. Essentially, each router partitions the entire set of network layer addresses into a number of Forwarding Equivalence Classes (FECs), and each FEC is mapped to a particular outgoing path (or set of paths, in the case of multi-path routing) based upon the routing protocol. The router determines an FEC for each packet of information based upon the network layer address of the packet, and forwards the packet of information to the corresponding outgoing path (or set of paths).

30

Network layer routing requires each router to process each packet of information at the network layer. This is an expensive and time-consuming operation that limits the performance of some routers and even prevents certain devices that do not support the networking protocol from performing routing and other functions on the packets.

35

Label switching can be used to eliminate the network layer processing by certain devices in the communication network. Label switching enables a packet to be transported across a network domain (referred to hereinafter as an "autonomous system" or "AS") using labels rather than the network layer address. Specifically, a Label Switched Path (LSP) is established from an ingress point border device to an egress point border device in the AS. The LSP traverses a number of label switching devices. Each label switching device assigns a short, fixed-length value (i.e., a "label") to each FEC that it supports. When the packet enters the ingress point border device, the ingress point border device uses the network address to assign the packet to a particular FEC, and inserts the corresponding label into the packet, specifically within a packet header. Each subsequent label switching device along the LSP uses the label in the packet to determine the next hop FEC for the packet, and replaces the label in the packet with a new label corresponding to the next hop FEC for the packet. The egress point border device removes the label from the packet. Thus, only the ingress point border device processes the packet at the network layer, and subsequent devices process the packet based upon the label only.

The Internet Engineering Task Force (IETF) Multi-Protocol Label Switching (MPLS) working group has defined an MPLS architecture for utilizing label switching for internetworking. MPLS is considered to be "multi-protocol" because it can be used with any network layer protocol, and is not limited to IP. An MPLS framework is described in an IETF Internet Draft document entitled A FRAMEWORK FOR MULTIPROTOCOL LABEL SWITCHING, which is referenced as draft-ietf-mpls-framework-02.txt (November 1997), and is hereby incorporated by reference in its entirety. The MPLS architecture is described in an IETF Internet Draft document entitled MULTIPROTOCOL LABEL SWITCHING ARCHITECTURE, which is referenced as draft-ietf-mpls-arch-05.txt (April 1999), and is hereby incorporated by reference in its entirety.

In order to use label switching for internetworking, each label switching device must learn the labels that are used by its neighboring label switching device(s). Therefore, the IETF MPLS working group has defined a Label Distribution Protocol (LDP) for distributing labels between neighboring label switching devices. LDP is described in an IETF Internet Draft document entitled LDP SPECIFICATION, which is referenced as

draft-ietf-mpls-ldp-04.txt (May 1999), and is hereby incorporated by reference in its entirety.

Each label switching device maintains a label information base (LIB) for mapping each FEC to a corresponding label. When the label switching device receives a packet including a label, the label switching device utilizes the LIB to map the received label to a next hop FEC and to retrieve a label for the next hop FEC. The label switching device then replaces the label in the packet with the label for the next hop FEC, and forwards the resulting packet to the corresponding outgoing path (or set of paths).

In certain situations, it is desirable to use label switching for routing packets across multiple autonomous systems. Two neighboring autonomous systems share a common border device such that, with respect to a particular routing path, the shared border device is the egress point for one AS and the ingress point for the other AS. For convenience, the AS from which the shared border device receives the packet is referred to as the "incoming" AS, while the AS to which the shared border device forwards the packet is referred to as the "outgoing" AS.

In order to use label switching across autonomous systems, a two-tiered labeling scheme is employed. The ingress point border device in each AS establishes an LSP to the corresponding egress point border device within the AS. Whenever an ingress point border device forwards a packet, the ingress point border device inserts two labels (referred to hereinafter as a "label stack") into the packet, specifically within a packet header. One label (referred to hereinafter as a "border label") is a label associated with the egress point border device within the AS, which the egress point border device provides to the ingress point border device along with "reachability" information using a modified Border Gateway Protocol (BGP). The other label (referred to hereinafter as an "interior label") is a label associated with the next hop FEC for the packet, as described above. The location of the interior label within the packet header is the same whether or not the packet header includes a border label, and therefore intermediate devices process the packet in the same manner whether or not the packet header includes a border label. Within a particular AS, each interior (non-border) device processes the packet based upon the interior label, and replaces the interior label in the packet with a new interior label corresponding to the next hop FEC for the packet, as described above. The egress point border device removes

the border label and the interior label from the packet. If the egress point border device is also an ingress point for a neighboring AS, then the ingress point border device inserts a new border label and a new interior label into the packet. The new border label is a label associated with an egress point border device within the neighboring AS, and the interior label is a label associated with the next hop FEC for the packet.

Although the two-tier mechanism allows label switching to be used for routing packets across multiple autonomous systems, the two-tier mechanism has a number of disadvantages. One disadvantage is that the two-tier mechanism requires that BGP be modified or extended to distribute labels. Another disadvantage is that the label stack adds a substantial amount of overhead per packet.

Thus, a mechanism for using label switching across autonomous systems that does not utilize a label stack and does not require any modifications to BGP would be valuable.

## SUMMARY OF THE INVENTION

In accordance with one aspect of the invention, a label switched path is established across multiple autonomous systems by establishing a label switched path in each autonomous system, and, at each shared border device, linking an incoming label switched path in an incoming autonomous system to an outgoing label switched path in an outgoing autonomous system. The Label Distribution Protocol is preferably used to establish the label switched path between border devices in each autonomous system. Each border device maps a label associated with the incoming label switched path to a label associated with the outgoing label switched path. When a border device receives a protocol message including the label associated with the incoming label switched device, the border device replaces the label in the protocol message with the label associated with the outgoing label switched path, and forwards the protocol message to the downstream neighboring (next hop) device in the outgoing autonomous system.

By using the Label Distribution Protocol to establish the label switched path within each autonomous system, a label switched path is established across multiple autonomous systems without requiring any modifications to BGP for carrying label information. Also, by having each border device "link" an incoming label switched path from an incoming autonomous system to an outgoing label switched path in an outgoing autonomous system,



label switching requires only a single label in each packet rather than a label stack, as in prior art embodiments.

5

## BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects and advantages of the invention will be appreciated more fully from the following further description thereof with reference to the accompanying drawings wherein:

10

FIG. 1 is a block diagram showing an exemplary communication system including two autonomous systems in accordance with an embodiment of the present invention;

FIG. 2 is a block diagram showing an exemplary label switched path across two autonomous systems and Label Distribution Protocol sessions between neighboring routers in accordance with an embodiment of the present invention;

FIG. 3 is a block diagram showing an exemplary label distribution scheme as known in the art;

FIG. 4 is a block diagram showing an exemplary label switched packet forwarding scheme using label stacks as known in the art;

FIG. 5 is a block diagram showing exemplary label switched paths established across each of two autonomous systems in accordance with an embodiment of the present invention;

FIG. 6 is a block diagram showing an exemplary label distribution scheme in accordance with an embodiment of the present invention;

FIG. 7 is a block diagram showing an exemplary label switched packet forwarding scheme in accordance with an embodiment of the present invention;

FIG. 8 is a logic flow diagram showing exemplary ingress point border router logic for establishing a LSP across multiple autonomous systems and forwarding a packet across the LSP in accordance with an embodiment of the present invention;

FIG. 9 is a logic flow diagram showing exemplary shared border router logic for establishing a LSP across multiple autonomous systems and forwarding a packet across the LSP in accordance with an embodiment of the present invention; and

30

FIG. 10 is a logic flow diagram showing exemplary shared border router logic for establishing a LSP across multiple autonomous systems and forwarding a packet across the LSP in accordance with an embodiment of the present invention.

5

## DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

10

As discussed above, a mechanism for using label switching across autonomous systems that does not utilize a label stack and does not require any modifications to BGP would be valuable. The present invention provides such a mechanism by using an LDP mechanism to establish the LSP from the ingress point border device to the egress point border device for each AS, and using a single label (rather than a label stack) in each packet in order to perform the label switching. The LDP mechanism provides the shared border device with the label associated with the last hop FEC in the incoming AS as well as the label associated with the first hop FEC in the outgoing AS. The shared border device maintains an LIB entry that maps the label associated with the last hop FEC in the incoming AS to the first hop FEC in the outgoing AS. When the shared border device receives a packet including the label associated with the last hop FEC in the incoming AS, the shared border device utilizes the LIB to obtain the label associated with the first hop FEC in the outgoing AS, and replaces the label in the packet with the label associated with the first hop FEC in the outgoing AS.

15

20

25

30

FIG. 1 shows an exemplary communication system 100 including two autonomous systems, which are labeled AS1 (102) and AS2 (104). The autonomous system AS1 (102) includes the border router BR1 (106), the interior routers IR1 (108) and IR2 (110), and the border router BR2 (112). The autonomous system AS2 (104) includes the border router BR2 (112), the interior routers IR3 (114) and IR4 (116), and the border router BR3 (118). The border router BR2 (112) is the shared border router between the autonomous system AS1 (102) and the autonomous system AS2 (104). The border routers BR1 (106), BR2 (112), and BR3 (118) run both BGP and an interior gateway protocol (IGP), such as OSPF, RIP, or Hello, while the interior routers IR1 (108), IR2 (110), IR3 (114), and IR4 (116) run only an IGP.

In accordance with an embodiment of the present invention, a LSP is established

across multiple autonomous systems. For example, as shown in FIG. 2, a LSP may be established from the border router BR1 (106) to the border router BR3 (118) across the autonomous systems AS1 (102) and AS2 (104). Each router, namely BR1 (106), IR1 (108), IR2 (110), BR2 (112), IR3 (114), IR4 (116), and BR3 (118), support LDP such that each router is capable of establishing a LDP session with its immediate neighboring router. Specifically, the router BR1 (106) is capable of establishing a LDP session with the router IR1 (108), the router IR1 (108) is capable of establishing a LDP session with the router IR2 (110), the router IR2 (110) is capable of establishing a LDP session with the router BR2 (112), the router BR2 (112) is capable of establishing a LDP session with the router IR3 (114), the router IR3 (114) is capable of establishing a LDP session with the router IR4 (116), and the router IR4 (116) is capable of establishing a LDP session with the router BR3 (118).

In a typical prior art embodiment, in order to establish a LDP across multiple autonomous systems, each router has to "learn" the interior label associated with its downstream neighboring router (i.e., the next hop router for the LDP), and each border router has to additionally "learn" the border label associated with its downstream neighboring border router. Each router obtains the interior label associated with its downstream neighboring router using LDP. Each border router obtains the border label associated with its downstream neighboring border router along with "reachability" information using a modified BGP.

For example, as shown in FIG. 3, in order to establish the LSP from the border router BR1 (106) to the border router BR3 (118) across the autonomous systems AS1 (102) and AS2 (104), each router has to "learn" the interior label associated with its downstream neighboring router (i.e., the next hop router for the LDP), and each border router has to additionally "learn" the border label associated with its downstream neighboring border router. For convenience, an interior label associated with a particular router is designated by "LIGP" followed by the router name (for example, LIGP-IR1), and a border label associated with a particular border router is designated by "LBGP" followed by the border router name (for example, LBGP-BR2). Each router obtains the interior label associated with its downstream neighboring router using LDP. Thus, as shown in FIG. 3, the router BR1 (106) "learns" the interior label LIGP-IR1 from the router IR1 (108)

using LDP, the router IR1 (108) "learns" the interior label LIGP-IR2 from the router IR2 (110) using LDP, the router IR2 (110) "learns" the interior label LIGP-BR2 from the router BR2 (112) using LDP, the router BR2 (112) "learns" the interior label LIGP-IR3 from the router IR3 (114) using LDP, the router IR3 (114) "learns" the interior label LIGP-IR4 from the router IR4 (116) using LDP, and the router IR4 (116) "learns" the interior label LIGP-BR3 from the router BR3 (118) using LDP. Each border router obtains the border label associated with its downstream neighboring border router along with "reachability" information using a modified BGP. Thus, as shown in FIG. 3, the border router BR1 (106) "learns" the border label LBGP-BR2 from the border router BR2 (112) via the modified BGP, and the border router BR2 (112) "learns" the border label LBGP-BR3 from the border router BR3 (118) via the modified BGP.

Once each router has "learned" the interior label associated with its downstream neighboring router and each border router has additionally "learned" the border label associated with its downstream neighboring border router, a packet can be sent over the LSP. Specifically, whenever an ingress point border router forwards a packet, the ingress point border router inserts a label stack including an interior label followed by a border label into the packet, specifically within a packet header. Within a particular AS, each interior (non-border) device processes the packet based upon the interior label, and replaces the interior label in the packet with a new interior label corresponding to the next hop FEC for the packet, as described above. The egress point border device removes the label stack from the packet. If the egress point border device is also an ingress point for a neighboring AS, then the ingress point border device inserts a new label stack into the packet.

For example, as shown in FIG. 4, when the border router BR1 (106) wants to send a packet to the border router BR3 (118) over the LSP, the border router BR1 (106) inserts a label stack into the packet. For convenience, the border label is shown on the bottom of the label stack, while the interior label is shown at the top of the label stack. The label stack inserted by the border router BR1 (106) includes the border label LBGP-BR2 and the interior label LISP-IR1. After inserting the label stack into the packet, the border router BR1 (106) forwards the packet on to the router IR1 (108).

The router IR1 (108) replaces the interior label LIGP-IR1 with the interior label

LIGP-IR2, and forwards the packet on to the router IR2 (110). The router IR2 (110) replaces the interior label LIGP-IR2 with the interior label LIGP-BR2, and forwards the packet on to the router BR2 (112). Because the border router BR2 (112) is the egress point border router for the autonomous system AS1 (102) as well as the ingress point border router for the autonomous system AS2 (104), the border router BR2 (112) replaces the label stack in the packet with a label stack including the border label LBGP-BR3 and the interior label LIGP-IR3, and forwards the packet on to the router IR3 (114).

The router IR3 (114) replaces the interior label LIGP-IR3 with the interior label LIGP-IR4, and forwards the packet on to the router IR4 (116). The router IR4 (116) replaces the interior label LIGP-IR4 with the interior label LIGP-BR3, and forwards the packet on to the router BR3 (118). Because the border router BR3 (118) is the egress point border router for the autonomous system AS2 (104), the border router BR3 (118) removes the label stack from the packet, and forwards the packet according to the network layer address.

In a preferred embodiment of the present invention, label switching is performed across multiple autonomous systems without using a two-tiered label stack and without requiring a modified BGP for distributing labels between border routers. Specifically, a preferred embodiment of the present invention provides performs label switching across multiple autonomous systems by using an LDP mechanism to establish the LSP from the ingress point border device to the egress point border device for each AS, and using a single label (rather than a label stack) in each packet in order to perform the label switching. The LDP mechanism provides the shared border device with the label associated with the last hop FEC in the incoming AS as well as the label associated with the first hop FEC in the outgoing AS. The shared border device maintains an LIB entry that maps the label associated with the last hop FEC in the incoming AS to the first hop FEC in the outgoing AS. When the shared border device receives a packet including the label associated with the last hop FEC in the incoming AS, the shared border device utilizes the LIB to obtain the label associated with the first hop FEC in the outgoing AS, and replaces the label in the packet with the label associated with the first hop FEC in the outgoing AS.

As shown in FIG. 5, when the border router BR1 (106) wants to establish the LSP

to the border router BR3 (118), the border router BR1 (106) establishes a LSP to the border router BR2 (112), the border router BR2 (112) establishes a LSP to the border router BR3 (118), and the border router BR2 (112) maps the LSP from the border router BR1 (106) to the LSP to the border router BR3 (118). Specifically, the border router BR1 (106) consults its routing table and determines therefrom that the border router BR2 (112) is the downstream neighboring border router. The border router BR1 (106) then initiates a LSP setup to the border router BR2 (112) using LDP. Upon receiving the LSP setup from the border router BR1 (106) in the incoming AS (102), the border router BR2 (112) determines that the FEC terminates at the border router BR3 (118) in the outgoing AS (104) (i.e., the border router BR2 determines that it is a shared border device), establishes a LSP to the border router BR3 (118) in the outgoing AS (104), and creates a LIB entry mapping the LSP from the incoming AS (102) to the LSP in the outgoing AS (104). Specifically, upon receiving the LSP setup from the border router BR1 (106), the border router BR2 (112) consults its routing table and determines therefrom that the border router BR3 (118) is the downstream neighboring border router. The border router BR2 (112) then initiates a LSP setup to the border router BR3 (118) using LDP. Upon receiving the LSP setup from the border router BR2 (112), the border router BR3 (118) determines that it is the termination point for the FEC, and therefore does not generate a LSP setup in another AS.

Thus, as shown in FIG. 6, the router BR1 (106) "learns" the label L-IR1 from the router IR1 (108) using LDP, the router IR1 (108) "learns" the label L-IR2 from the router IR2 (110) using LDP, the router IR2 (110) "learns" the label L-BR2 from the router BR2 (112) using LDP, the router BR2 (112) "learns" the label L-IR3 from the router IR3 (114) using LDP, the router IR3 (114) "learns" the label L-IR4 from the router IR4 (116) using LDP, and the router IR4 (116) "learns" the label L-BR3 from the router BR3 (118) using LDP. The border router BR2 (112) creates a LIB entry that maps the label associated with the last hop FEC in the incoming AS (102), which is the label associated with the border router BR2 (112), to the label associated with the first hop FEC in the outgoing AS (104), which is the label associated with the interior router IR3 (114).

Once each router has "learned" the label associated with its downstream neighboring router and the shared border router has created a LIB entry that maps the label

associated with the last hop FEC in the incoming AS to the label associated with the first hop FEC in the outgoing AS, a packet can be sent over the LSP. Specifically, the ingress point border router inserts a label into the packet, specifically within a packet header. Each interior (non-border) router replaces the label in the packet with a new label corresponding to the next hop FEC for the packet, and forwards the packet to the next hop router. A shared border router replaces the label in the packet with a new label corresponding to the next hop FEC for the packet, and forwards the packet to the next hop router. The egress point border router removes the label from the packet, and forwards the packet based upon the network layer address of the packet.

For example, as shown in FIG. 7, when the border router BR1 (106) wants to send a packet to the border router BR3 (118) over the LSP, the border router BR1 (106) inserts the label L-IR1 into the packet, and forwards the packet on to the router IR1 (108). The router IR1 (108) replaces the label L-IR1 with the label L-IR2, and forwards the packet on to the router IR2 (110). The router IR2 (110) replaces the label L-IR2 with the label L-BR2, and forwards the packet on to the router BR2 (112). The border router BR2 (112) replaces the label L-BR2 with the label L-IR3, and forwards the packet on to the router IR3 (114). The router IR3 (114) replaces the label L-IR3 with the label L-IR4, and forwards the packet on to the router IR4 (116). The router IR4 (116) replaces the label L-IR4 with the label L-BR3, and forwards the packet on to the router BR3 (118). Because the border router BR3 (118) is the egress point border router for the autonomous system AS2 (104), the border router BR3 (118) removes the label from the packet, and forwards the packet according to the network layer address.

Thus, the various border routers in the communication system cooperate to establish a LSP across multiple autonomous systems by "linking" together a number of AS-specific LSPs. Specifically, each border router establishes a LSP to its downstream neighboring border router. Each shared border router "links" the LSP from its incoming AS (referred to hereinafter as the "incoming LSP") to the LSP for its outgoing AS (referred to hereinafter as the "outgoing LSP") by mapping a label associated with the incoming LSP, which is a label associated with the border router itself, to a label associated with the outgoing LSP, which is equal to a label associated with the downstream neighboring (next hop) router in the outgoing LSP. Upon receiving a packet, the ingress point border router

inserts into the packet a label associated with its downstream neighboring (next hop) router, and forwards the packet to its downstream neighboring (next hop) router. Each shared border router replaces the label in the packet with a new label equal to the label associated with its downstream neighboring (next hop) router according to the mapping maintained by the shared border router. The egress point border router removes the label from the packet.

FIG. 8 is a logic flow diagram showing exemplary ingress point border router logic 800 for establishing a LSP across multiple autonomous systems and forwarding a packet across the LSP. Starting in step 802, the logic first determines a downstream neighboring border router, in step 804, and establishes a LSP to the downstream neighboring border router, in step 806. The logic then "learns" a label associated with its downstream neighboring (next hop) router, in step 808, specifically via a LDP session with the downstream neighboring (next hop) router. Upon receiving a packet, in step 810, the logic inserts into the packet the label associated with the downstream neighboring (next hop) router, in step 812, and forwards the packet to the downstream neighboring (next hop) router, in step 814. The logic terminates in step 899.

FIG. 9 is a logic flow diagram showing exemplary shared border router logic 900 for establishing a LSP across multiple autonomous systems and forwarding a packet across the LSP. Starting in step 902, the logic maps a first label from a first autonomous system to a second label in a second autonomous system, in step 904. Then, upon receiving from the first autonomous system a packet including the first label, in step 906, the logic replaces the first label with the second label in the packet, in step 908, and forwards the packet to a downstream neighboring (next hop) router in the second autonomous system, in step 910. The logic terminates in step 999.

FIG. 10 shows more detailed exemplary shared border router logic 1000. Starting in step 1002, the logic first establishes an incoming LSP with its upstream neighboring border router over the incoming AS, in step 1004, specifically as part of the LSP setup procedure initiated by the upstream neighboring border router. The logic assigns a label for the incoming LSP, in step 1006, which it sends to the upstream neighboring (last hop) router via an LDP session. The logic also establishes an outgoing LSP to its downstream neighboring border router over the outgoing AS, in step 1008. The logic "learns" the label



associated with its downstream neighboring (next hop) router in the outgoing AS, in step 1010, specifically via an LDP session. The logic creates a LIB entry mapping the label associated with the incoming LSP to the label associated with the downstream neighboring (next hop) router, in step 1012. Upon receiving a packet including the label associated with the incoming LSP, in step 1014, the logic replaces the label in the packet with the label associated with the downstream neighboring (next hop) router, in step 1016, and forwards the packet to the downstream neighboring (next hop) router, in step 1018. The logic terminates in step 1099.

In a preferred embodiment of the present invention, predominantly all of the logic 800, 900, and 1000 for establishing LSPs across multiple autonomous systems is implemented as a set of computer program instructions that are stored in a computer readable medium and executed by an embedded microprocessor system within the router. Preferred embodiments of the invention may be implemented in any conventional computer programming language. For example, preferred embodiments may be implemented in a procedural programming language (*e.g.*, "C") or an object oriented programming language (*e.g.*, "C++"). Alternative embodiments of the invention may be implemented using discrete components, integrated circuitry, programmable logic used in conjunction with a programmable logic device such as a Field Programmable Gate Array (FPGA) or microprocessor, or any other means including any combination thereof.

Alternative embodiments of the invention may be implemented as a computer program product for use with a computer system. Such implementation may include a series of computer instructions fixed either on a tangible medium, such as a computer readable media (*e.g.*, a diskette, CD-ROM, ROM, or fixed disk), or fixed in a computer data signal embodied in a carrier wave that is transmittable to a computer system via a modem or other interface device, such as a communications adapter connected to a network over a medium. The medium may be either a tangible medium (*e.g.*, optical or analog communications lines) or a medium implemented with wireless techniques (*e.g.*, microwave, infrared or other transmission techniques). The series of computer instructions embodies all or part of the functionality previously described herein with respect to the system. Those skilled in the art should appreciate that such computer instructions can be written in a number of programming languages for use with many

computer architectures or operating systems. Furthermore, such instructions may be stored in any memory device, such as semiconductor, magnetic, optical or other memory devices, and may be transmitted using any communications technology, such as optical, infrared, microwave, or other transmission technologies. It is expected that such a computer program product may be distributed as a removable medium with accompanying printed or electronic documentation (*e.g.*, shrink wrapped software), preloaded with a computer system (*e.g.*, on system ROM or fixed disk), or distributed from a server or electronic bulletin board over the network (*e.g.*, the Internet or World Wide Web).

It should be noted that the term "packet" is used herein generically to describe various protocol messages that are processed by a communication device, and should not be construed to limit application of the present invention to a specific protocol message format or communication protocol. Thus, a "packet" may be any protocol message including, but not limited to, a frame, a packet, a datagram, a user datagram, or a cell.

It should also be noted that the terms "router" and "switch" are used herein generically to describe any of a variety of devices that implement the described protocols and procedures for establishing LSPs across multiple autonomous systems, and should not be construed to limit application of the present invention to any specific type of device.

It should further be noted that, although the present invention utilizes the IETF Label Distribution Protocol (LDP) for distributing labels between various label switching devices, the mechanisms described herein can be applied more generally to other protocols, including, but not limited to, various embodiments of the IETF LDP as currently defined or hereinafter revised. The present invention is in no way limited to the IETF LDP.

Thus, the present invention may be embodied as a method for establishing a label switched path across multiple autonomous systems involving mapping a first label from a first autonomous system to a second label in a second autonomous system, receiving from the first autonomous system a protocol message including the first label, replacing the first label with the second label in the protocol message, and forwarding the protocol message to a downstream neighboring (next hop) device in the second autonomous system.

The present invention may also be embodied as a device for establishing a label switched path across multiple autonomous systems including mapping logic for mapping a

first label from a first autonomous system to a second label in a second autonomous system, receiving logic for receiving from the first autonomous system a protocol message including the first label, replacing logic for replacing the first label with the second label in the protocol message, and forwarding logic for forwarding the protocol message to a downstream neighboring (next hop) device in the second autonomous system.

The present invention may also be embodied as a program product comprising a computer readable medium having embodied therein a computer program for establishing a label switched path across multiple autonomous systems, where the computer program includes mapping logic for mapping a first label from a first autonomous system to a second label in a second autonomous system, receiving logic for receiving from the first autonomous system a protocol message including the first label, replacing logic for replacing the first label with the second label in the protocol message, and forwarding logic for forwarding the protocol message to a downstream neighboring (next hop) device in the second autonomous system.

The present invention may also be embodied as a communication system including a plurality of autonomous systems, where each autonomous system has at least a border device that is shared with another autonomous system, and where the shared border device includes at least mapping logic for mapping a first label from a first autonomous system to a second label in a second autonomous system, receiving logic for receiving from the first autonomous system a protocol message including the first label, replacing logic for replacing the first label with the second label in the protocol message, and forwarding logic for forwarding the protocol message to a downstream neighboring (next hop) device in the second autonomous system.

The present invention may be embodied in other specific forms without departing from the essence or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive.

We claim:

1. A method for establishing a label switched path across multiple autonomous systems, the method comprising:

5 mapping a first label from a first autonomous system to a second label in a second autonomous system;  
receiving from said first autonomous system a protocol message including said first label;  
replacing said first label with said second label in said protocol message; and  
10 forwarding said protocol message to a downstream neighboring (next hop) device in said second autonomous system.

2. The method of claim 1, comprising:

establishing an incoming label switched path over said first autonomous system;  
15 associating said first label with said incoming label switched path;  
establishing an outgoing label switched path over said second autonomous system;  
learning said second label associated with said downstream neighboring (next hop) device in said second autonomous system;  
mapping said first label from said first autonomous system to said second label in  
20 said second autonomous system;  
receiving from said first autonomous system said protocol message including said first label;  
replacing said first label with said second label in said protocol message; and  
forwarding said protocol message to said downstream neighboring (next hop)  
25 device in said second autonomous system.

3. The method of claim 2, wherein establishing said outgoing label switched path over said second autonomous system comprises:

30 using a Label Distribution Protocol to set up said outgoing label switched path to a downstream neighboring border device.

4. The method of claim 2, wherein learning said second label associated with said downstream neighboring (next hop) device in said second autonomous system comprises:

establishing a Label Distribution Protocol session with said downstream neighboring (next hop) device; and

5 receiving said second label associated with said downstream neighboring (next hop) device in said second autonomous system via said Label Distribution Protocol session.

5. The method of claim 2, wherein mapping said first label from said first autonomous system to said second label in said second autonomous system comprises:

10 maintaining a label information base; and

creating in said label information base a label information base entry mapping said first label from said first autonomous system to said second label in said second autonomous system.

6. A device for establishing a label switched path across multiple autonomous systems, the device comprising:

mapping logic operably coupled to map a first label from a first autonomous system to a second label in a second autonomous system;

5 receiving logic operably coupled to receive from said first autonomous system a protocol message including said first label;

replacing logic responsive to the receiving logic and operably coupled to replace said first label with said second label in said protocol message; and

10 forwarding logic responsive to the replacing logic and operably coupled to forward said protocol message to a downstream neighboring (next hop) device in said second autonomous system.

7. The device of claim 6, comprising:

15 first label switched path establishing logic operably coupled to establish an incoming label switched path over said first autonomous system and associate said first label with said incoming label switched path;

second label switched path establishing logic responsive to said first label switched path establishing logic and operably coupled to establish an outgoing label switched path over said second autonomous system;

20 label distribution logic operably coupled to obtain said second label from said downstream neighboring (next hop) device in said second autonomous system;

mapping logic operably coupled to map said first label from said first autonomous system to said second label in said second autonomous system;

25 receiving logic operably coupled to receive from said first autonomous system said protocol message including said first label;

replacing logic responsive to said receiving logic and operably coupled to replace said first label with said second label in said protocol message; and

30 forwarding logic responsive to said replacing logic and operably coupled to forward said protocol message to said downstream neighboring (next hop) device in said second autonomous system.

8. The device of claim 7, wherein said second label switched path establishing logic comprises Label Distribution Protocol logic.

9. The device of claim 7, wherein said label distribution logic comprises Label Distribution Protocol logic operably coupled to establish a Label Distribution Protocol session with said downstream neighboring (next hop) device and receive said second label associated with said downstream neighboring (next hop) device in said second autonomous system via said Label Distribution Protocol session.

10. The device of claim 7, further comprising a label information base, wherein said mapping logic is operably coupled to create in said label information base a label information base entry mapping said first label from said first autonomous system to said second label in said second autonomous system.

11. A program product comprising a computer readable medium having embodied therein a computer program for establishing a label switched path across multiple autonomous systems, the computer program comprising:

mapping logic programmed to map a first label from a first autonomous system to a second label in a second autonomous system;

receiving logic programmed to receive from said first autonomous system a protocol message including said first label;

replacing logic responsive to the receiving logic and programmed to replace said first label with said second label in said protocol message; and

forwarding logic responsive to the replacing logic and programmed to forward said protocol message to a downstream neighboring (next hop) device in said second autonomous system.

12. The program product of claim 11, comprising:

first label switched path establishing logic programmed to establish an incoming label switched path over said first autonomous system and associate said first label with said incoming label switched path;

second label switched path establishing logic responsive to said first label switched path establishing logic and programmed to establish an outgoing label switched path over said second autonomous system;

label distribution logic programmed to obtain said second label from said downstream neighboring (next hop) device in said second autonomous system;

mapping logic programmed to map said first label from said first autonomous system to said second label in said second autonomous system;

receiving logic programmed to receive from said first autonomous system said protocol message including said first label;

replacing logic responsive to said receiving logic and programmed to replace said first label with said second label in said protocol message; and

forwarding logic responsive to said replacing logic and programmed to forward said protocol message to said downstream neighboring (next hop) device in said second autonomous system.



13. The program product of claim 12, wherein said second label switched path establishing logic comprises Label Distribution Protocol logic.

14. The program product of claim 12, wherein said label distribution logic comprises Label Distribution Protocol logic programmed to establish a Label Distribution Protocol session with said downstream neighboring (next hop) device and receive said second label associated with said downstream neighboring (next hop) device in said second autonomous system via said Label Distribution Protocol session.

15. The program product of claim 12, wherein said mapping logic is programmed to maintain a label information base and to create in said label information base a label information base entry mapping said first label from said first autonomous system to said second label in said second autonomous system.

16. A communication system comprising a plurality of autonomous systems, each autonomous system having at least a border device that is shared with another autonomous system, wherein the shared border device links an incoming label switched path from an incoming autonomous system to an outgoing label switched path in an outgoing autonomous system.

17. An information base comprising at least one entry mapping a first label from a first autonomous system to a second label in a second autonomous system.

## ABSTRACT OF THE DISCLOSURE

A system, device, and method for establishing label switched paths across multiple autonomous systems involves establishing a label switched path in each autonomous system, and, at each shared border device, linking an incoming label switched path in an incoming autonomous system to an outgoing label switched path in an outgoing autonomous system. The Label Distribution Protocol is preferably used to establish the label switched path between border devices in each autonomous system. Each border device maps a label associated with the incoming label switched path to a label associated with the outgoing label switched path. When a border device receives a protocol message including the label associated with the incoming label switched device, the border device replaces the label in the protocol message with the label associated with the outgoing label switched path, and forwards the protocol message to the downstream neighboring (next hop) device in the outgoing autonomous system.

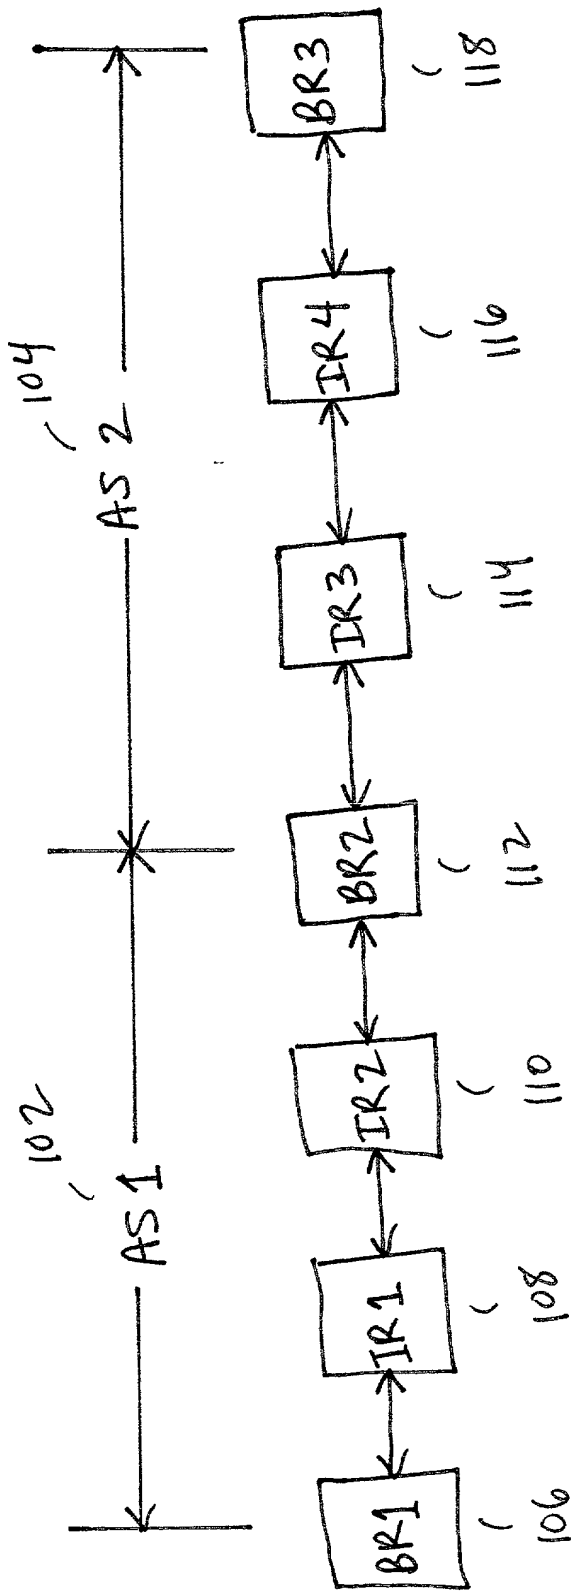


FIG. 1 100

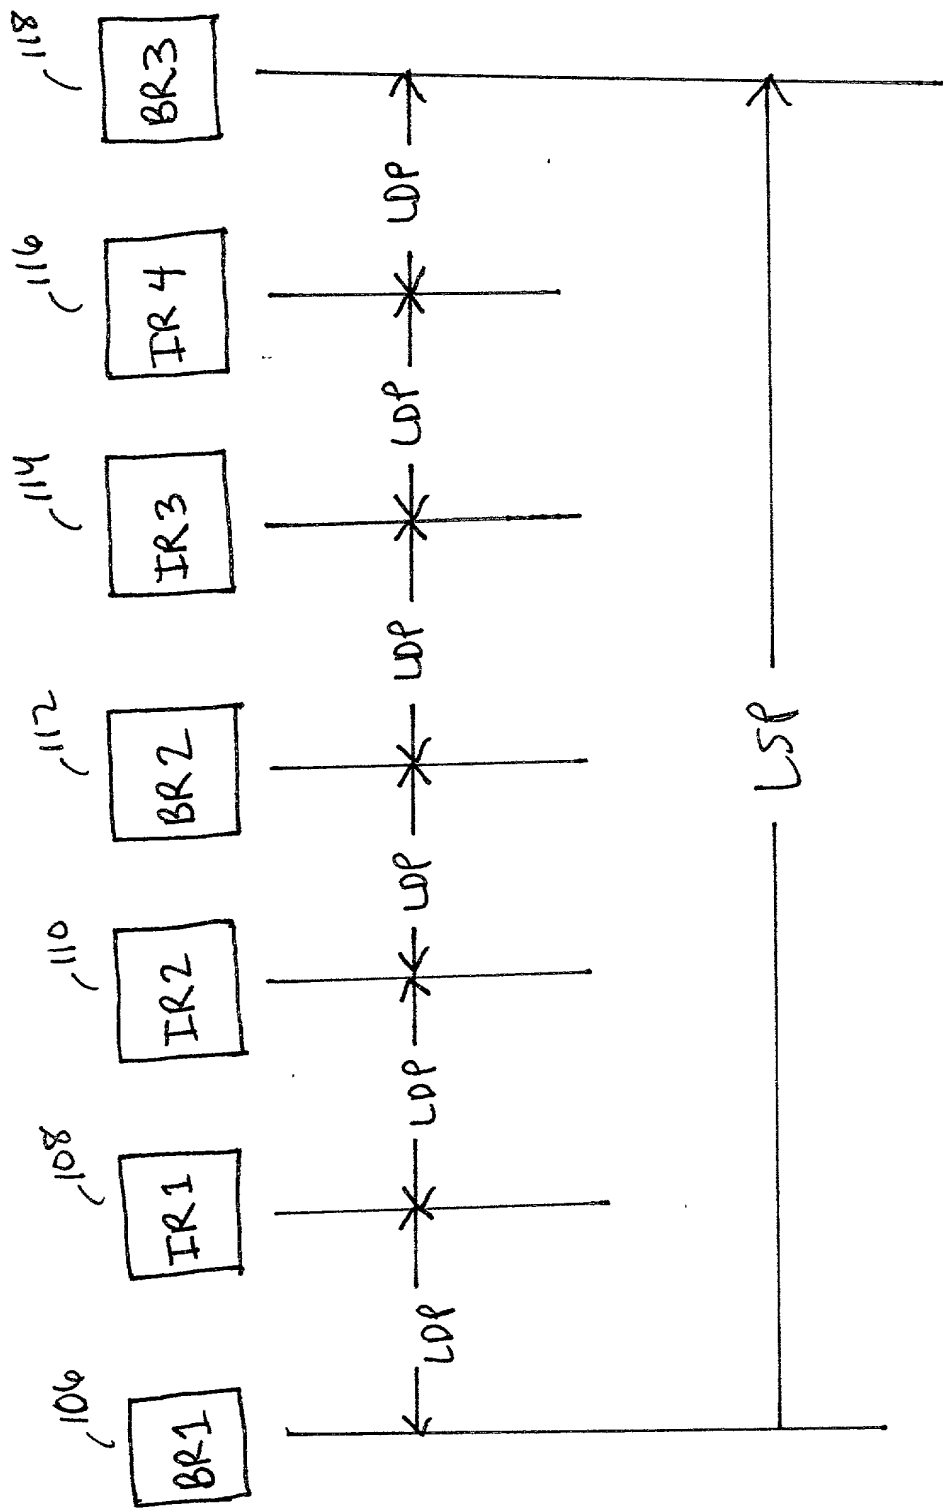


FIG. 2

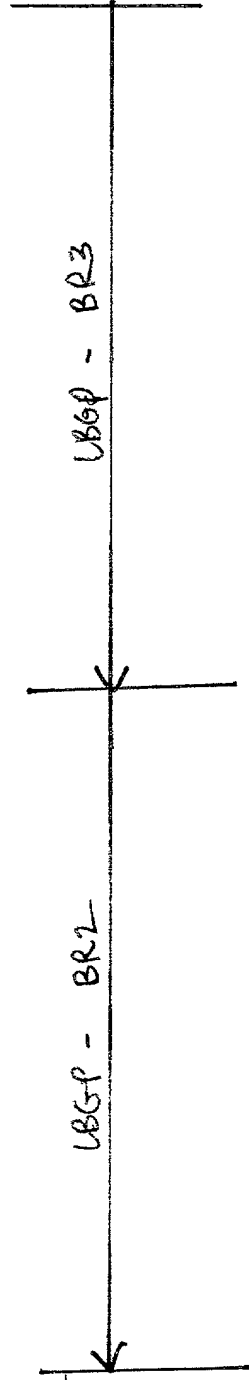
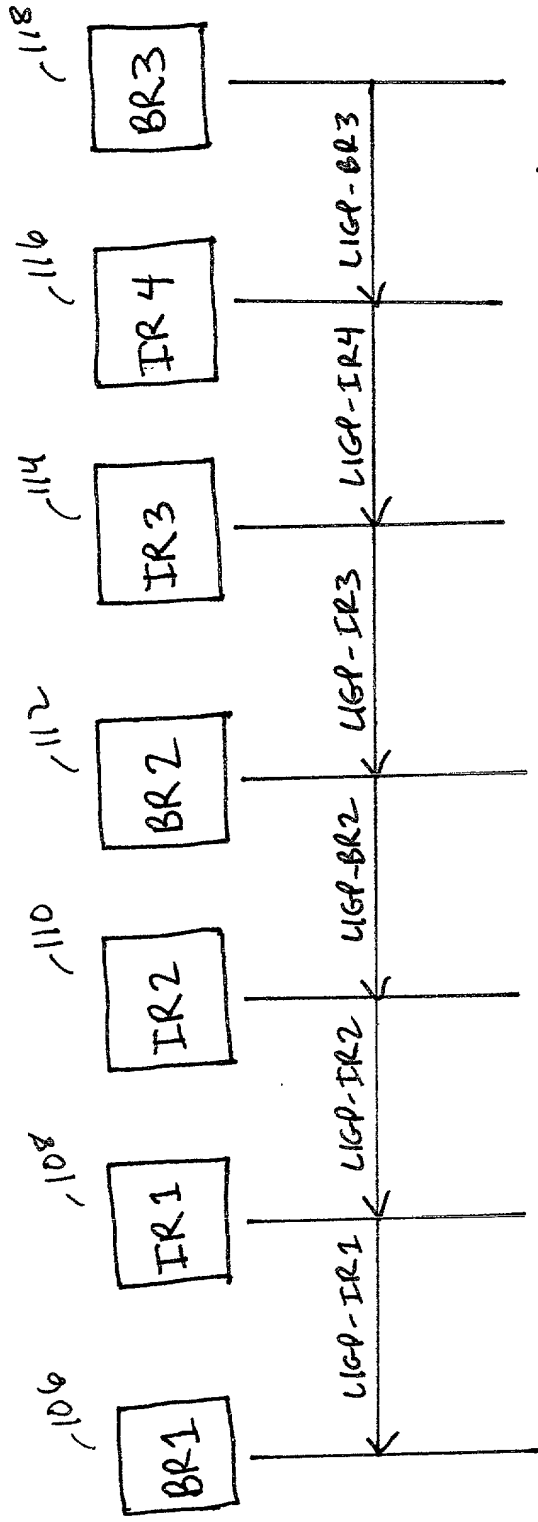


FIG. 3 PRIOR ART

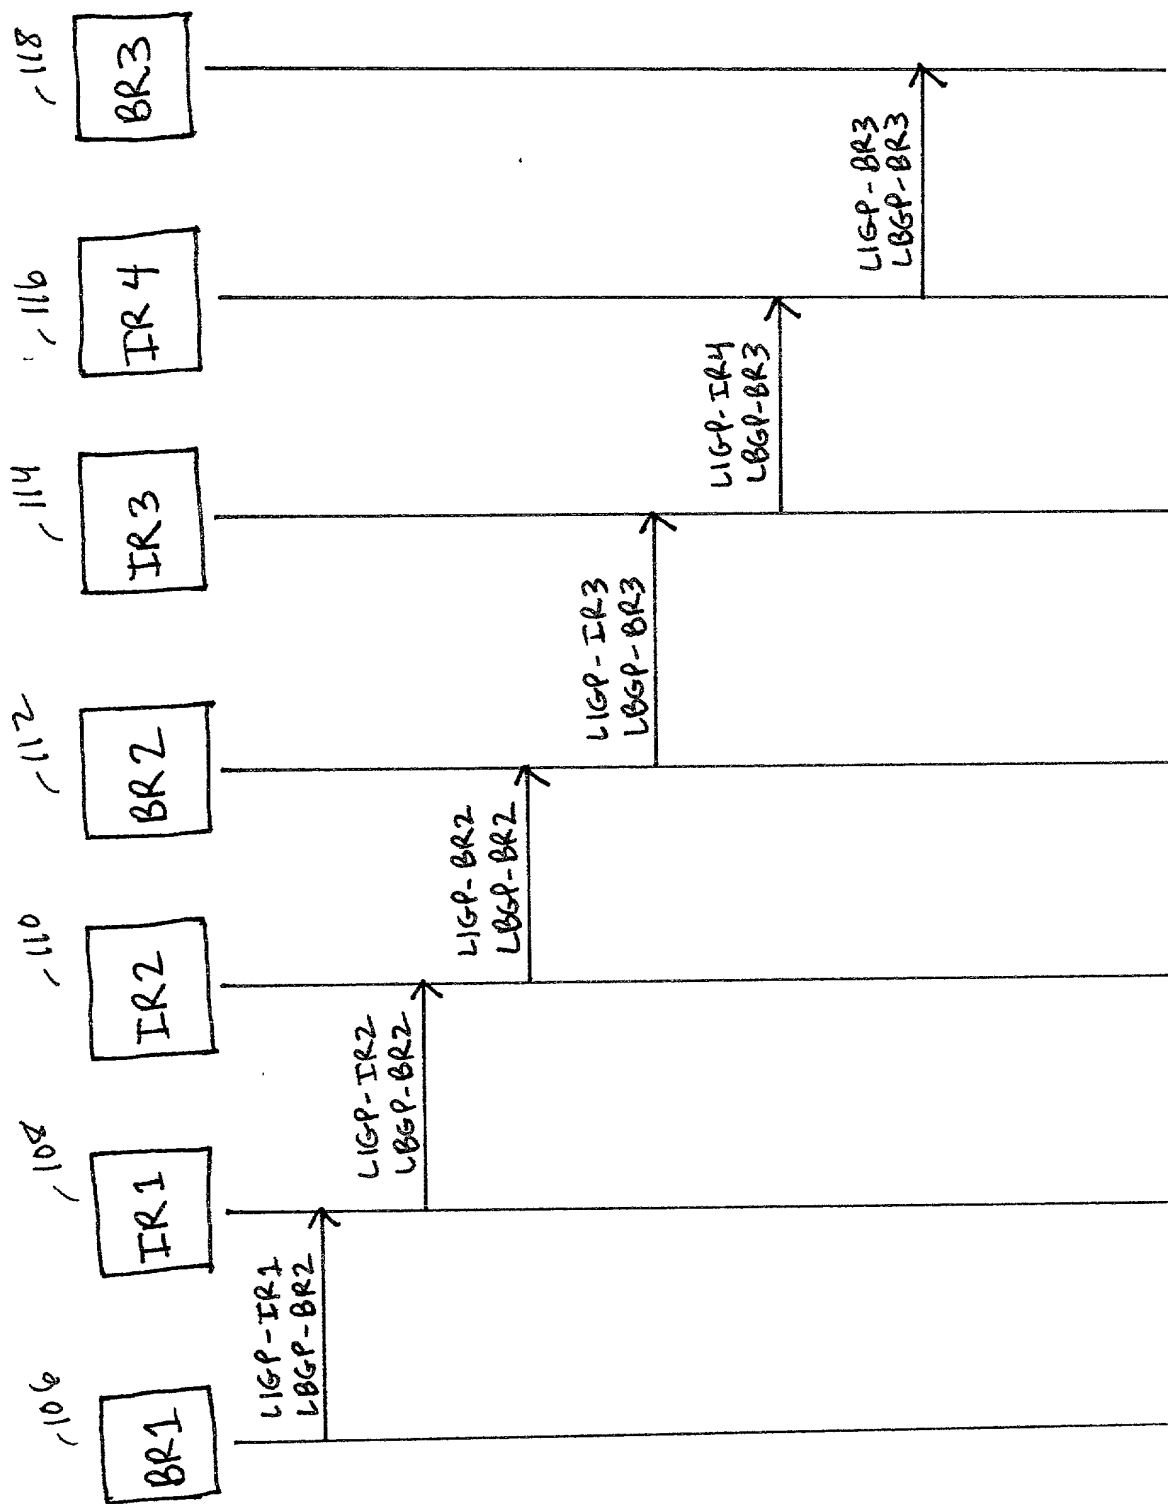


FIG. 4 PRIOR ART



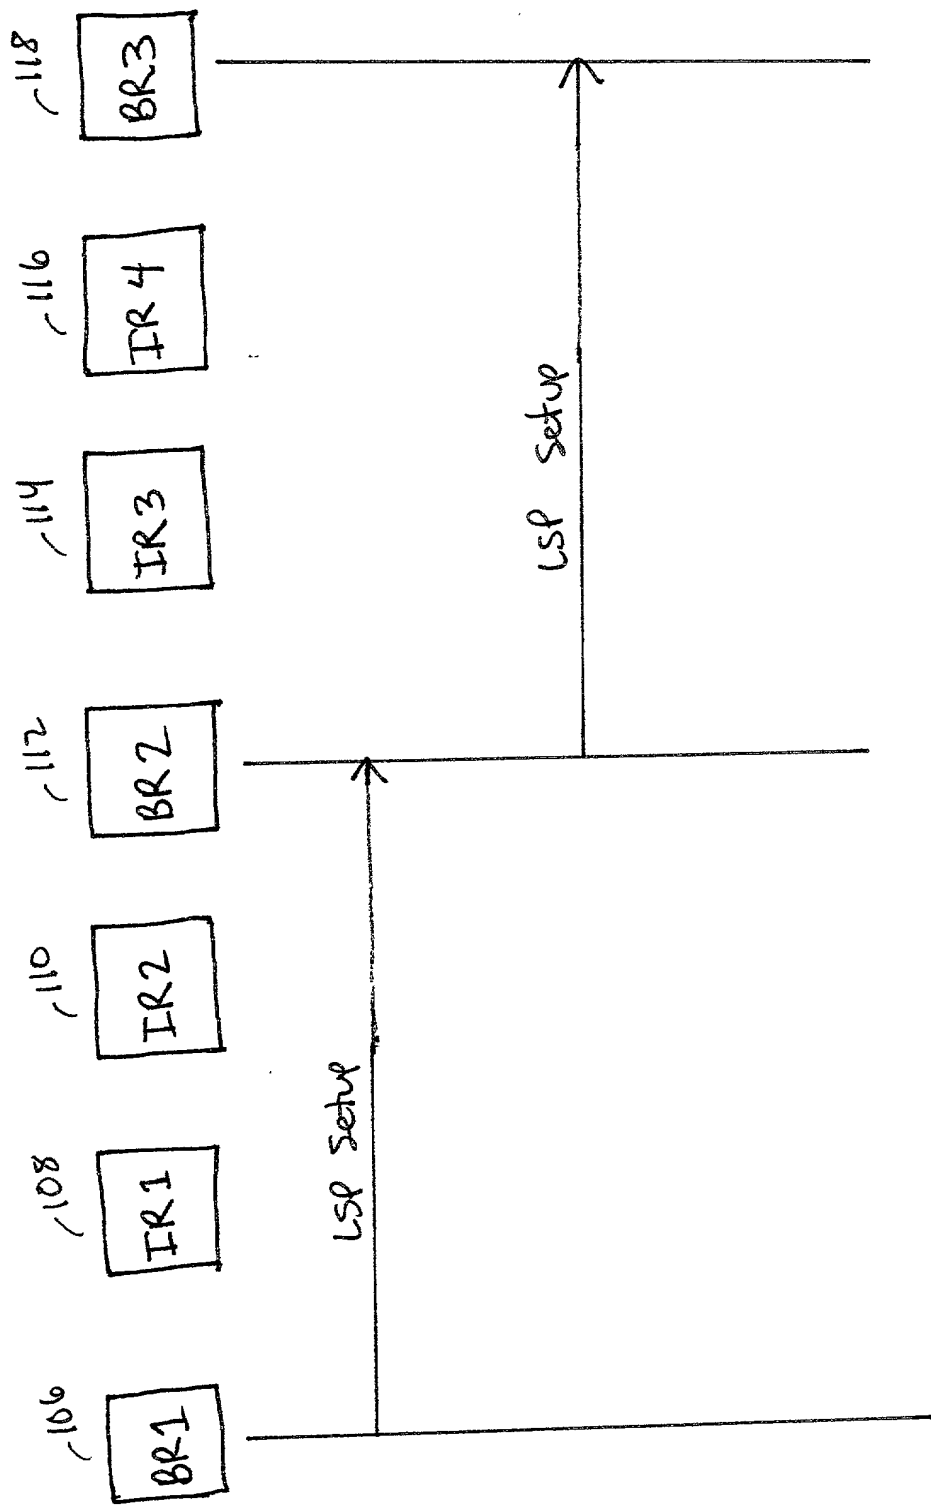


FIG. 5

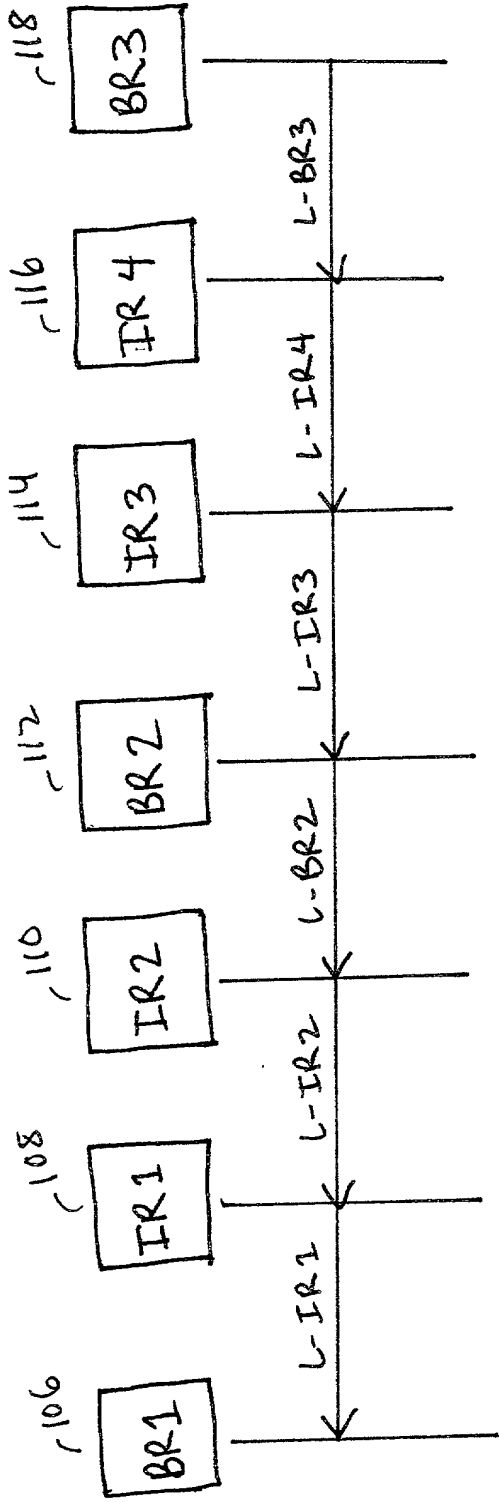


FIG. 6

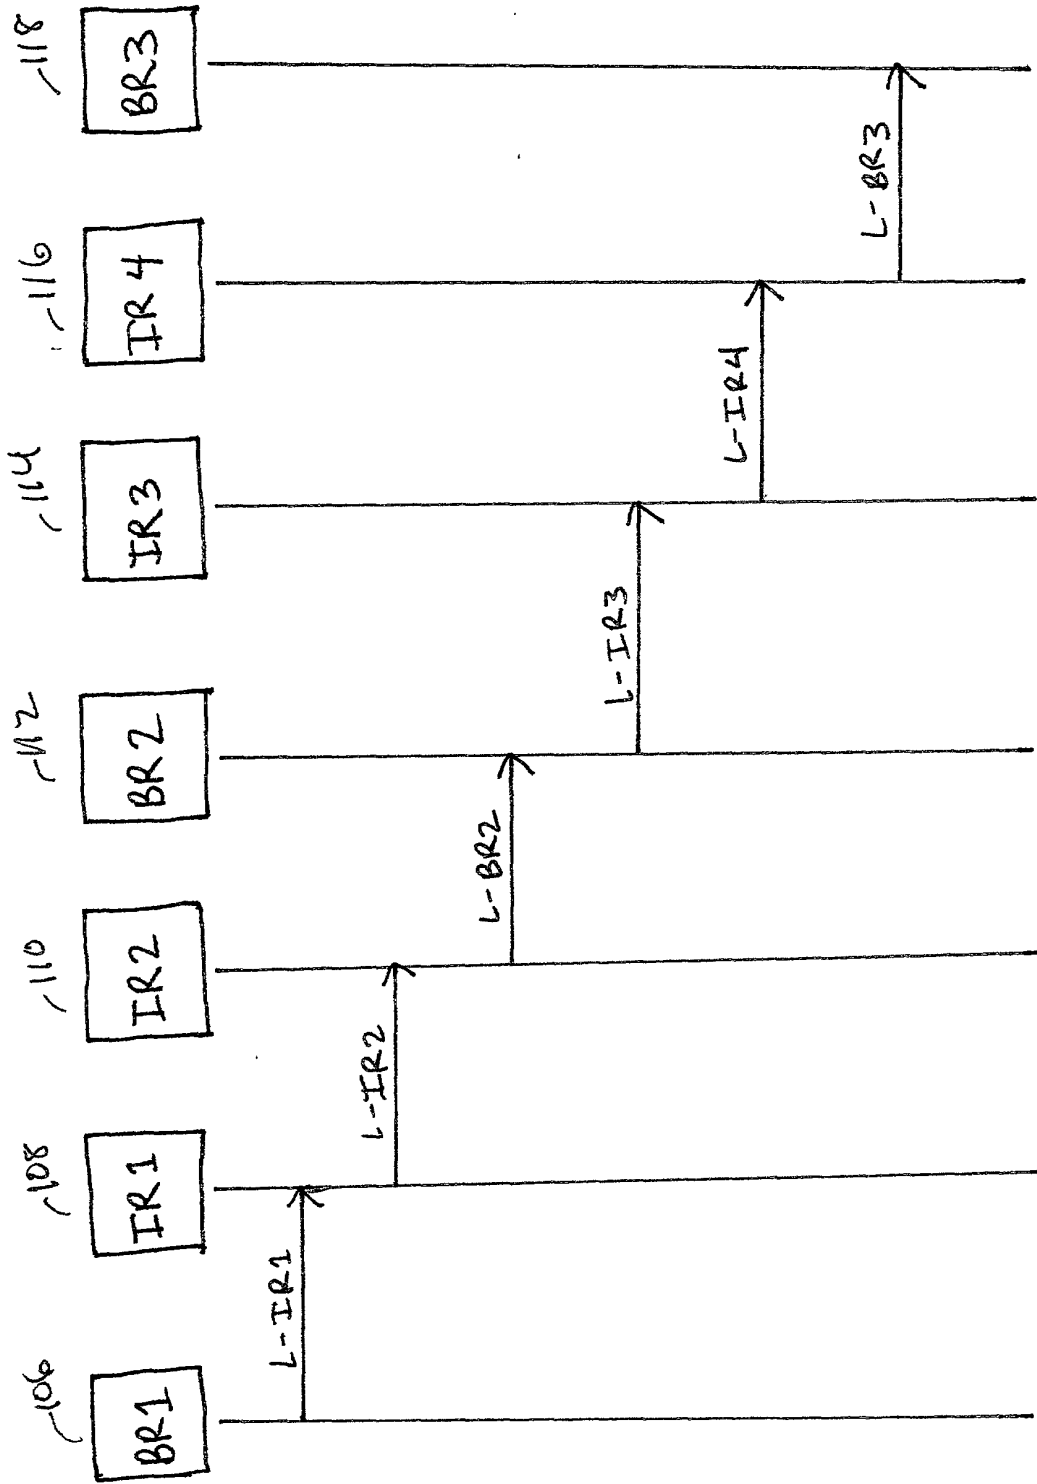


FIG. 7

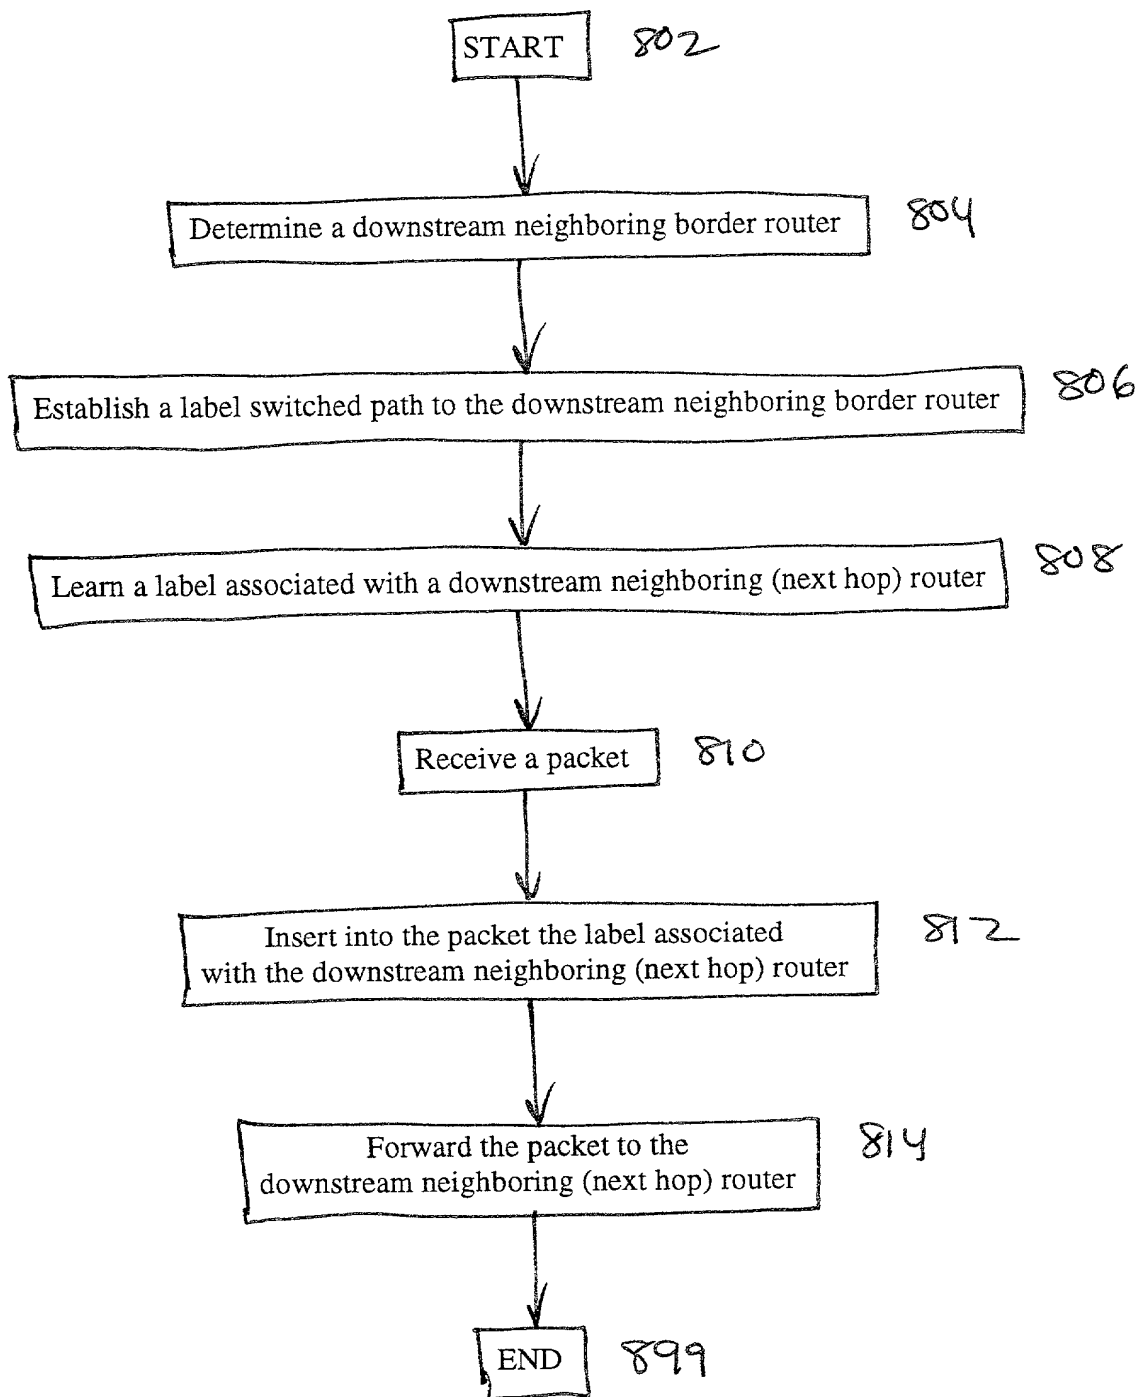


FIG. 8 800

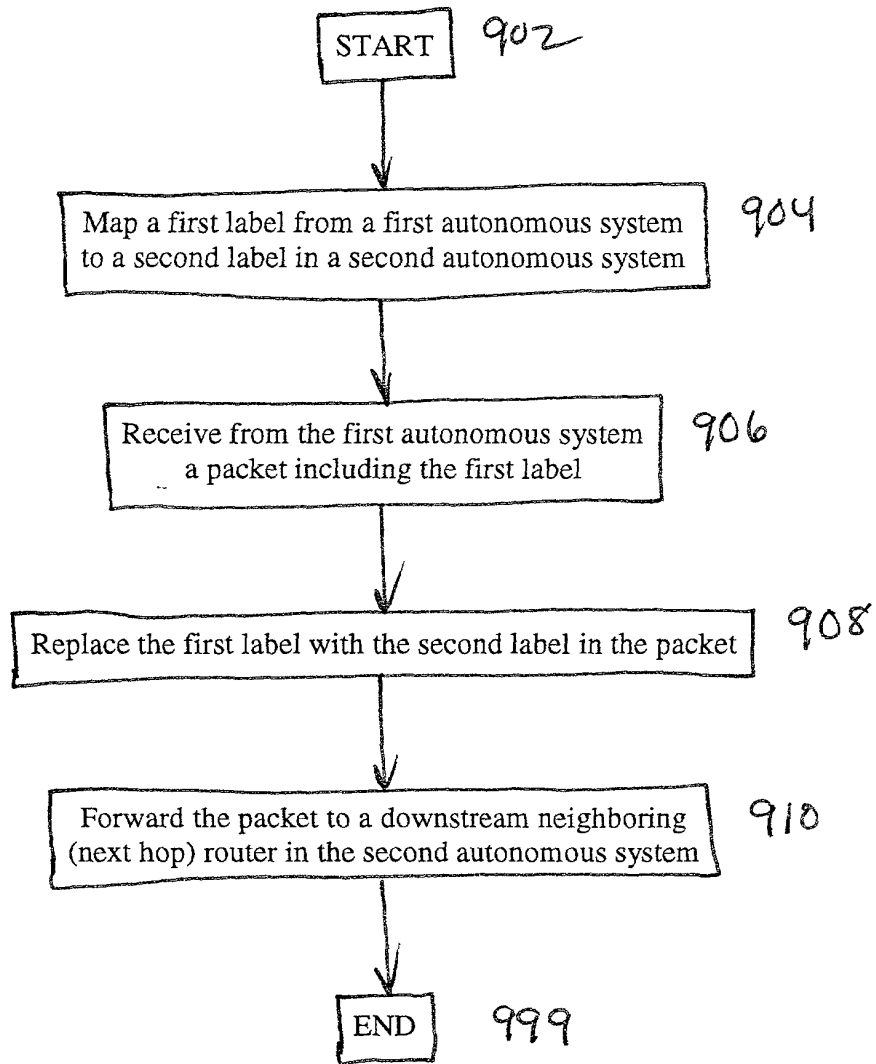


FIG. 9 900

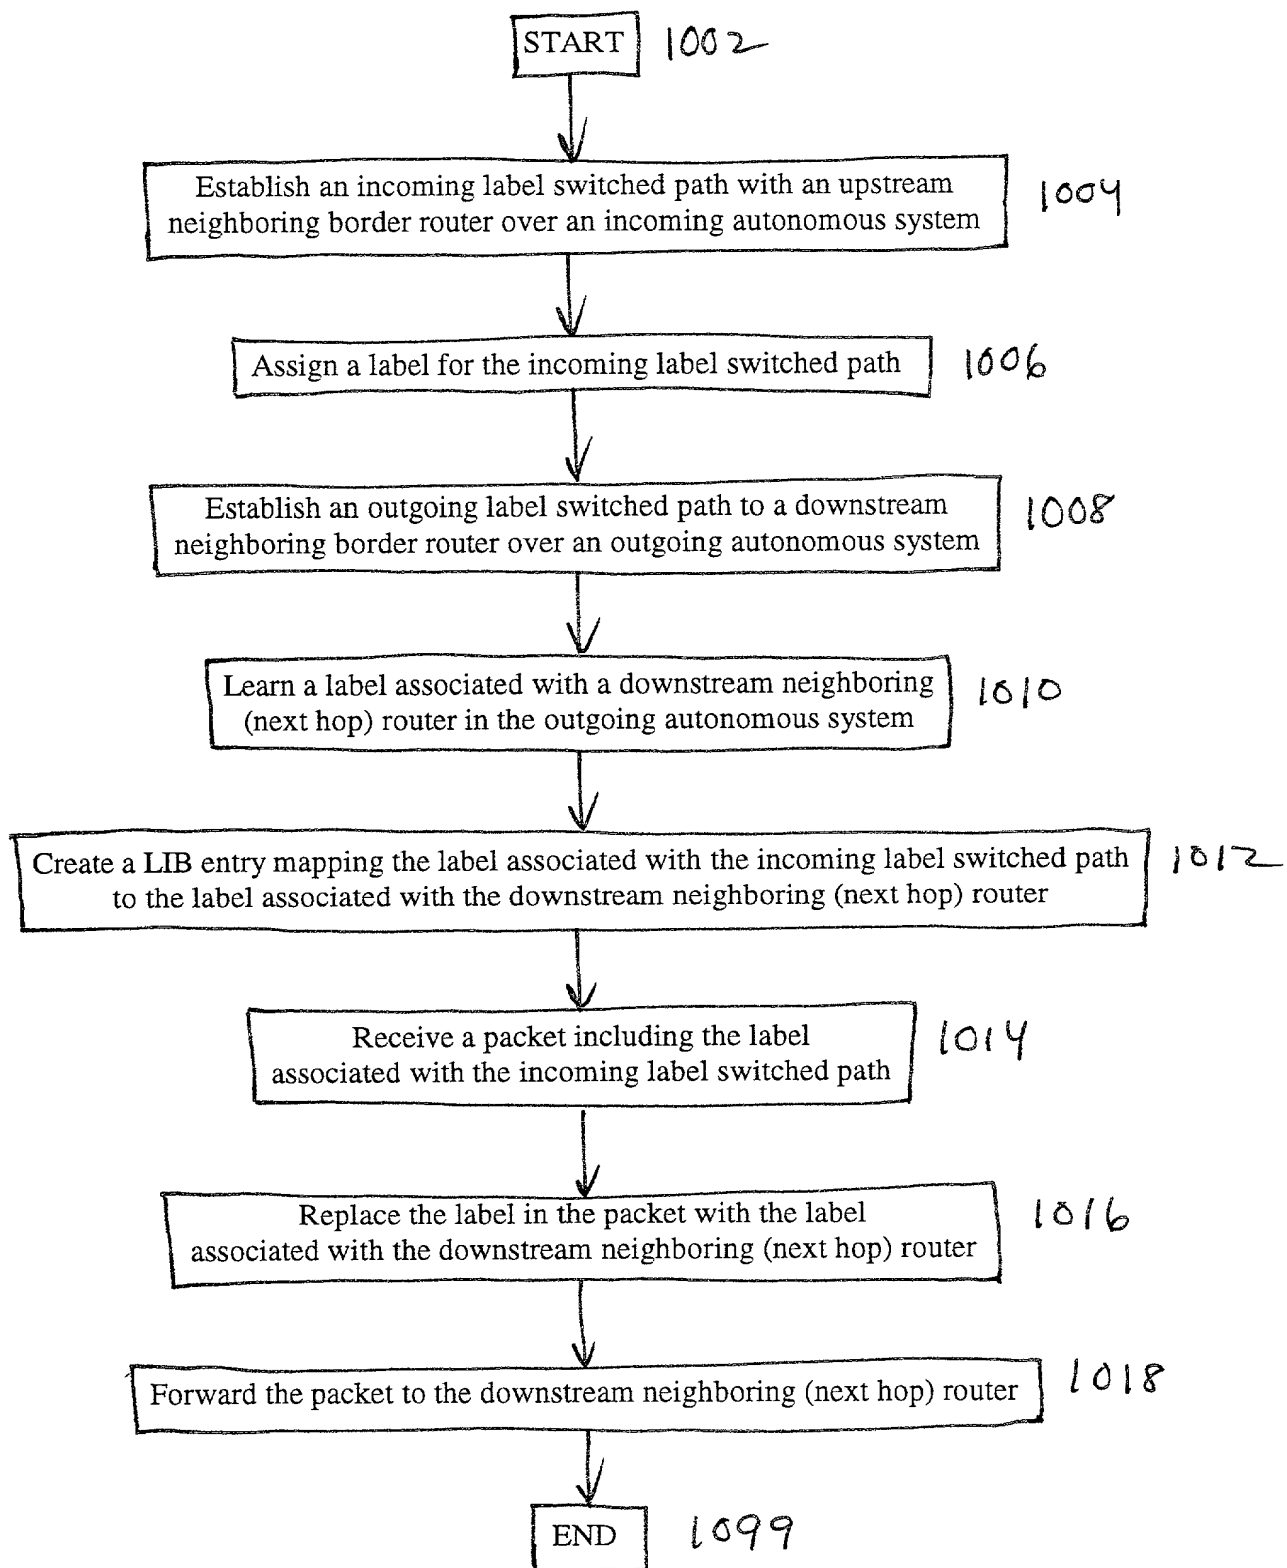


FIG. 10 1000

Docket No.  
2204/150

# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**SYSTEM, DEVICE, AND METHOD FOR ESTABLISHING LABEL SWITCHED PATHS ACROSS  
MULTIPLE AUTONOMOUS SYSTEMS**

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International  
Application Number \_\_\_\_\_  
and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)			Priority Not Claimed
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.



POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Bruce D. Sunstein	Reg. No. 27,234	Jay Sandvos	Reg. No. 43,900
Robert M. Asher	Reg. No. 30,445	Sonia K. Guterman	Reg. No. 44,729
Timothy M. Murphy	Reg. No. 33,198	Keith J. Wood	Reg. No. 45,235
Steven G. Saunders	Reg. No. 36,265	Mary M. Steubing	Reg. No. 37,946
Harriet M. Strimpel	Reg. No. 37,008	Christopher J. Cianciolo	Reg. No. 42,417
Samuel J. Petuchowski	Reg. No. 37,910	Lindsay J. McGuinness	Reg. No. 38,549
Jeffrey T. Klayman	Reg. No. 39,250		
John J. Stickevers	Reg. No. 39,387		
Herbert A. Newborn	Reg. No. 42,031		
Elizabeth P. Morano	Reg. No. 42,904		
Jean M. Tibbetts	Reg. No. 43,193		

Send Correspondence to: **Jeffrey T. Klayman**  
**Bromberg & Sunstein LLP**  
**125 Summer Street**  
**Boston, MA 02110**

Direct Telephone Calls to: *(name and telephone number)*  
**Jeffrey T. Klayman at (617) 443-9292**

Full name of sole or first inventor <b>Anoop Ghanwani</b>	
Sole or first inventor's signature	Date
Residence <b>147 Parlmont Park, North Billerica, MA 01862</b>	
Citizenship <b>India</b>	
Post Office Address <b>Same as residence</b>	

Full name of second inventor, if any <b>Andre Fredette</b>	
Second inventor's signature	Date
Residence <b>21 Old Carriage Path, Groton, MA 01450</b>	
Citizenship <b>U.S.A.</b>	
Post Office Address <b>Same as residence</b>	

Full name of third inventor, if any <b>Naganand Doraswamy</b>	
Third inventor's signature	Date
Residence <b>112 Hutchinson Road, Arlington, MA 02474</b>	
Citizenship <b>India</b>	
Post Office Address <b>Same as residence</b>	

Full name of fourth inventor, if any	
Fourth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of fifth inventor, if any	
Fifth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of sixth inventor, if any	
Sixth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	